


## Model C85 i D85

### Dane techniczne modelu C 85

Model	EAN-Nr. 4025092*	Udźwig kg	Liczba ciągien	Wymiary łańcucha d x p Zoll	Podnoszenie na 1 obrót dźwigni mm	Siła podnoszenia przy obciążeniu nominalnym daN	Ciężar własny przy stand. wys. podnoszenia 1,5 m kg
C85 750	*050173	750	1	5/8" x 3/8"	115	38	8,7
C85 1500	*050180	1.500	1	1" x 1/2"	45	31	17,0
C85 3000	*050197	3.000	1	1 1/4" x 5/8"	36	40	22,2
C85 6000	*050203	6.000	2	1 1/4" x 5/8"	18	44	38,0
C85 10000	*050326	10.000	3	1 1/4" x 5/8"	12	44	67,0

### Wymiary modelu C85

Model	C85 750	C85 1500	C85 3000	C85 6000	C85 10000
Amin., mm	322	389	403	560	785
B, mm	21	27	35	48	61
C, mm	27	30	34	46	54
D, mm	15	20	25	40	40
D1, mm	17	23	25	40	45
E, mm	443	443	570	570	570
F, mm	112	189	197	197	305
G, mm	56	134	142	142	163
H, mm	56	55	55	55	142
J, mm	142	171	179	218	218
K, mm	39	72	76	76	76
L, mm	103	99	103	142	142

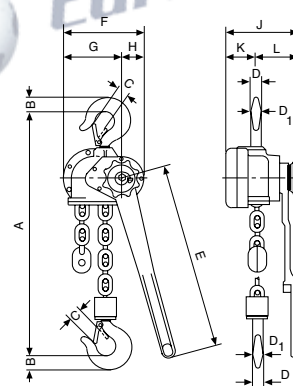

Model C/D85

### Dane techniczne modelu D 85

Model	EAN-Nr. 4025092*	Udźwig kg	Liczba ciągien	Wymiary łańcucha d x p mm	Podnoszenie na 1 obrót dźwigni mm	Siła podnoszenia przy obciążeniu nominalnym daN	Ciężar własny przy stand. wys. podnoszenia 1,5 m kg
D85 750	*050548	750	1	6 x 18,5	111	38	8,2
D85 1500	*050555	1.500	1	9 x 27	45	31	16,3
D85 3000	*050562	3.000	1	11 x 31	33	40	19,6
D85 6000	*050579	6.000	2	11 x 31	17	42	32,9
D85 10000	*050784	10.000	3	11 x 31	11	37	60,0

### Wymiary modelu D 85

Model	D85 750	D85 1500	D85 3000	D85 6000	D85 10000
Amin., mm	322	389	403	532	805
B, mm	21	27	35	48	61
C, mm	27	30	34	46	54
D, mm	15	20	25	40	40
D1, mm	17	23	25	40	45
E, mm	443	443	570	570	570
F, mm	112	189	197	197	305
G, mm	56	134	142	142	163
H, mm	56	55	55	55	142
J, mm	142	171	179	218	218
K, mm	39	72	76	76	76
L, mm	103	99	103	142	142

## Model C85 i D85

